

## Model TOUCAN 8E-L MAST BOOM LIFTS

### Performance


• Working height	8.20 m
• Working outreach (standard platform)	2.65 m
• Working outreach (XL- platform)	2.82 m
• Up and over height	5.08 m
• Swing (not continuous)	345°
• Platform capacity <sup>1</sup>	200 kg
• Jib - overall length	1.17 m
• Jib - range of articulation	112° (+45°/ -67°)
A. Platform size standard platform (L x W)	0.85 x 0.92 m
Platform size XL platform (L x W)	1.06 x 0.92 m
B. Overall width	0.99 m
C. Tailswing	17 cm
D. Stowed height	1.99 m
E. Overall length (standard platform)	2.10 m
Overall length (XL platform)	2.35 m
F. Wheelbase	1.20 m
G. Ground clearance	10 cm
• Machine weight - standard platform <sup>2</sup>	1,860 kg
• Machine weight - XL- platform <sup>2</sup>	2,125kg
• Maximum ground bearing pressure <sup>2</sup>	15,9 kg/cm <sup>2</sup>
• Maximum ground bearing pressure - XL- platform	17,1 kg/cm <sup>2</sup>
• Drive speed - lowered	5.5 km/h
• Turning radius (outside)	1.99 m
• Turning radius (inside)	0.55 m
• Gradeability	25%




<sup>1</sup> Capacity shown is maximum two persons indoor and one person outdoor (12.5 m/s wind speed)

<sup>2</sup> Certain options or country standards may increase weight and/or dimensions.

### Reach Diagram

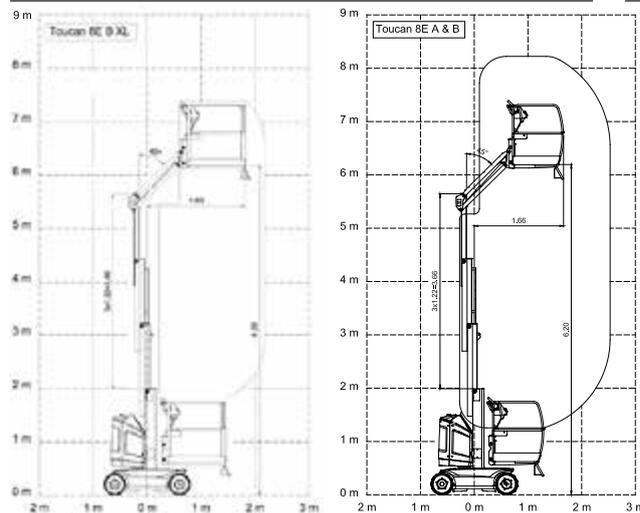

### Dimensions

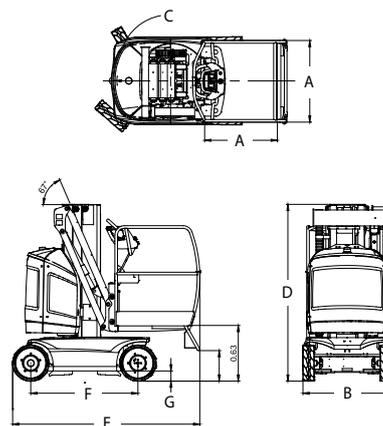

### IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

# JLG®

## JLG EMEA BV

Polaris Avenue 63  
2132 JH Hoofddorp  
The Netherlands  
Tel: +31 (0)23 565 5665  
Fax: +31 (0)23 557 3750

[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company